


Cisco 640-893

**Supporting Cisco Data Center System Devices
(DCTECH) v1.0
Version: 4.3**

QUESTION NO: 1

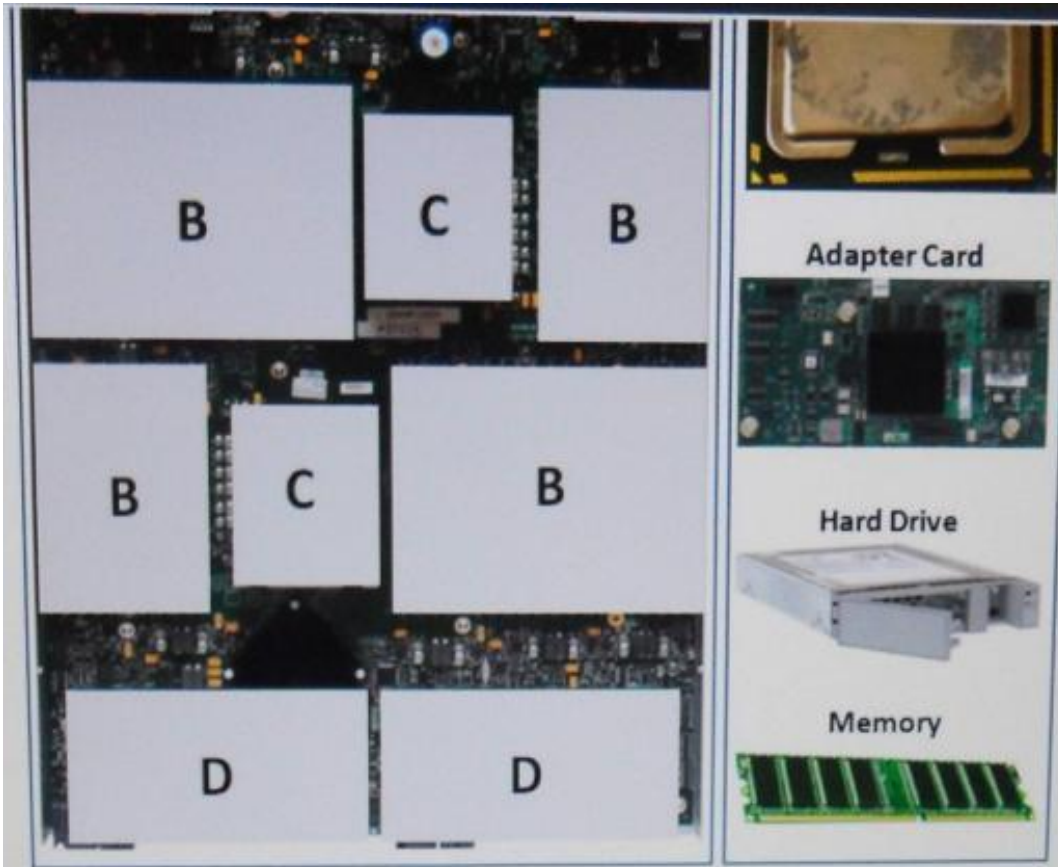

Refer to the exhibit The pictures on the right are the internal components of the Cisco UCS 6250 Blade Server Which component image should be applied to which empty component block?

- A. CPU for block A, adapter card for block B, hard drive for block C. memory for block D
- B. CPU for block C. adapter card for block D, hard drive for block A. memory for block B
- C. CPU for block B, adapter card for block C, hard drive for block D, memory for block B
- D. CPU for block D. adapter card for block A. hard drive for block B. memory for block C

Answer: B

Explanation:

QUESTION NO: 2

Which two commands or key sequences display a list of the available commands in the Cisco NX-OS prompt UCS-switch (nxos) #? (Choose two)


- A. Tab (key)
- B. help

- C. ?
- D. ~ (tilde key)
- E. w

Answer: B,C

Explanation:

QUESTION NO: 3

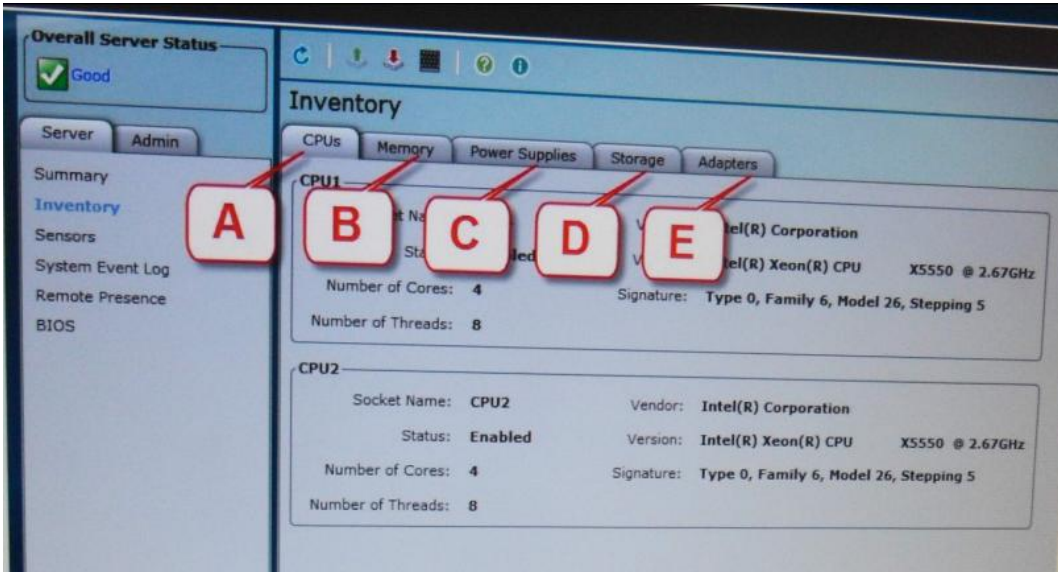

Refer to the exhibit

Which tab displays the hard disk drives that are installed?

- A. A-CPUs
- B. B - Memory
- C. Power Supplies
- D. D - Storage
- E. E -Adapters

Answer: D

Explanation:

QUESTION NO: 4

When the Cisco UCS Manager is used to verify the B- or C-Series device types of Overall Status are acceptable and do not indicate failure? (Choose two.)

- A. Online
- B. OK
- C. Unassociated
- D. Active

Answer: B,C

Explanation:

QUESTION NO: 5

Which cable is used to access the command-line interface of a Cisco UCS 6120XP Fabric Interconnects?

- A. KVM cable
- B. console cable
- C. Ethernet cable
- D. SFP+ Ethernet transceiver cable

Answer: B

Explanation:

QUESTION NO: 6

Which cable is used to access the command-line -interface of a Cisco UCS 6120XP Fabric Interconnects?

- A. KVM cable
- B. console cable
- C. Ethernet cable
- D. SFP+ Ethernet transceiver cable

Answer: B

Explanation:

QUESTION NO: 7



- A. Block A, power supply. Block B is a supervisor module
- B. Block A is switching module, Block B is a fan tray
- C. Block A, Power Supply, Block B are crossbar modules
- D. Block A, Service module. Block B Supervisor Module

Answer: C

Explanation:

QUESTION NO: 8

From the Cisco NX-OS prompt"UCS-switch (nxos) #, which command displays the Cisco NX-OS

configuration that is currently in use?

- A. show configuration
- B. show startup-config
- C. show boot-config
- D. show mem-config
- E. show running-config

Answer: E

Explanation:

QUESTION NO: 9

Which action should the administrator take before physically removing a blade server for maintenance or replacement?

- A. Force the server to shut down
- B. Disassociate the service profile
- C. Decommission the server
- D. Perform a graceful shutdown of the server

Answer: C

Explanation:

QUESTION NO: 10

Which command-line interface mode is best described by this prompt?

UCS-switch-A (nxos)#

- A. maintenance mode
- B. EXEC mode
- C. local management mode
- D. global configuration mode
- E. Cisco IOS mode

Answer: B

Explanation: