

IBM

Exam C8060-350

**IBM WebSphere Transformation Extender V8.4, Application
Development**

Version: 6.0

[Total Questions: 63]

Question No : 1

When using WebSphere Transformation Extender to integrate with an e-mail provider, which two of the following are TRUE statements?

- A. The e-mail adapter's -ATTACH command only supports a single attachment.
- B. It is mandatory to enter a subject when using the e-mail adapter to send a message.
- C. The Importer Wizard must be used to create the type tree for the WebSphere e-mail adapter.
- D. Use the e-mail adapter's Receipt command (-RCPT or -RECEIPT) to request a return receipt.

Answer: A,D

Question No : 2

What WebSphere Transformation Extender tool could be used to deploy a map to another platform?

- A. Map Exporter
- B. Archive Creator
- C. Resource Registry
- D. Integration Flow Designer

Answer: D

Question No : 3

Using the map debugger, what will happen when the breakpoint is encountered in the image shown here and Step-In is selected for a reference map?

The screenshot shows the WebSphere Transformation Extender map debugger interface. The 'Rule' section displays the rule: `-F_MakeBenefitRecord(HRRecord:HRFile)`. The 'Map' section is divided into 'From' and 'To' columns. The 'From' column contains the following items: `1# HRFile (HRFile Data)`, `HRFile`, and `HRRecord (s)`. The 'To' column contains the following items: `1# StockBenefitsFile (BenefitFile Root)`, `Output`, `StockBenefitsFile`, `TitleText Field = "Employee Stock Purchase Summary"`, and `BenefitRecord (s) =F_MakeBenefitRecord(HRRecord:HRFile)`. A red 'X' icon, representing a breakpoint, is positioned on the `BenefitRecord (s)` row in the 'To' column.

The debugger will:

- A. go to the beginning of the next rule to be run.
- B. go to the end of the rule and will not show resultant object values.
- C. show the values for each HRRecord and each rule within the reference functional map.
- D. show the values for each HRRecord object, not each rule within the reference functional map.

Answer: C

Question No : 4

If a map contains two input cards with default settings and the second card fails validation, what happens to the map execution?

- A. The map fails.
- B. The map executes successfully.
- C. The map execution continues the mapping process.
- D. Trace and Audit log will turn on to capture the error.

Answer: A

Question No : 5

Which of the following is an effect of adding a Restart attribute to an input type tree?

- A. The map attempts to reprocess invalid data.
- B. The map automatically resets after a map failure.
- C. Data validation stops if there are unrecognized objects.
- D. Data validation continues, even if there are unrecognized objects.

Answer: D

Question No : 6

What is the difference between a map called using the RUN function and a functional map?

- A. A map called using the RUN function is a compiled map, a functional map is not.
- B. A map called using the RUN function is referenced by another map through a map rule, a functional map is not
- C. The data sources and target settings are not ignored in a map called using the RUN function, they are ignored in a functional map.
- D. The definition for a map called using the RUN function does not need to be in the same map source file as the executable map, the functional map definition does.

Answer: C

Question No : 7

A database table is depicted here:

Part_Number	Part_Description
101LG	Blouse
309KM	Trousers

Which of the following functions COULD be used to return only the text string that is found in the Part_Description column of the database?

- A. Either DBLOOKUP or DBQUERY
- B. DBQUERY
- C. DDEQUERY
- D. DBLOOKUP

Answer: A

Question No : 8

An application developer needs to create a type tree that contains numerous infix delimited groups, and numerous unsigned integer elements. What is the easiest way to create the type tree?

- A. Create a group with the group and item properties.
- B. Create a category with the group and item properties.
- C. Create separate groups for the group properties and the item properties.
- D. Create the groups and elements then organize them as a subtype of a category.

Answer: B

Question No : 9


Which of the following statements about command line qualifiers is TRUE? They must begin with:

- A. a dash (-) and are case sensitive.
- B. a dash (-) and are case insensitive.
- C. an ampersand (&) and are case sensitive.
- D. an ampersand (&) and are case insensitive.

Answer: B

Question No : 10

Refer to image shown here:

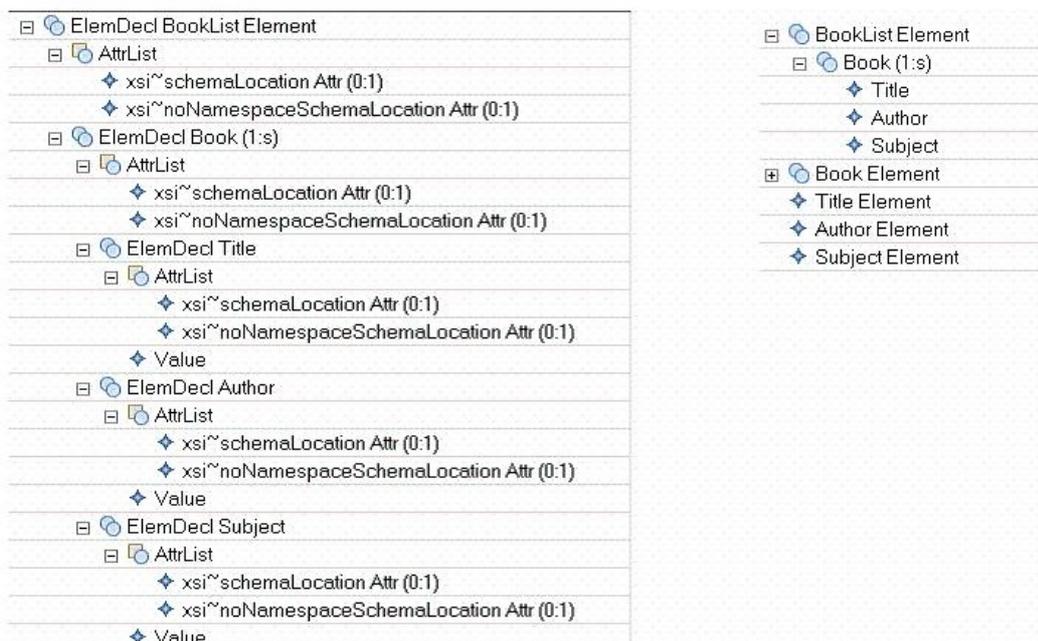

Which of the following statements is TRUE with regards to the type trees created using the XML Schema Importer.

- A. The trees were created with different schemas.
- B. One tree was created using XSDL Hints and Xerces validation.
- C. One tree was created using Classic validation and XSDL Hints.
- D. One tree was created using Classic validation and the other using Xerces validation.

Answer: B

Question No : 11

Review the image shown here:



Consider the audit log fragment here:

```

level="2" size="243" status="E07">CustomerOrder</object>
level="3" size="36" status="E07">Detail Record</object>
level="4" size="2" status="E01">UOM Field</object>
<Text>NN</Text>
level="3" size="9" status="E09">Trailer Record</object>
<User>TotalLineItems Field contains invalid Count</User>

```

Which of the following statements is TRUE?

- A. The component rule for the Trailer Record uses the REJECT function.
- B. The component rule for the Trailer Record uses the ONERROR function.
- C. The data audit setting for Trailer Record is set to Track=Error, Details=Error, and Item Data=Occurrence.
- D. The data audit setting for CustomerOrder is set to Track=Error, Details=Error and Item Data=Occurrence.

Answer: B